

Features

- 1/3" Color Sony Super HAD CCD
- 550 lines, 0.002 lux
- 2.8~12mm or 6~50mm Day/Night vari-focal
- True Day/Night using moving filter (IR sensitive)
- DNR (Digital Noise Reduction) chipset for outstanding performance in low light conditions without the need for added illumination
- 24VAC
- Can be flush or surface mounted (fits standard gang box)
- OSD (On Screen Display)
- Weatherproof (IP66) with heater
- 3-D camera bracket, Installer video out
- 3-year warranty




DNR DIGITAL NOISE REDUCTION

TDN TRUE DAY / NIGHT

Model	HDCVF2DR	HDCVF6DR
Image Sensor	Color 1/3" Sony Super HAD CCD	
Lens	2.8~12mm DC auto-iris	6~50mm DC auto-iris
Field of View	92.0~24.6° Horizontal	43.6~4.0° Horizontal
Horizontal Resolution	550 TV Lines / 590 TV Lines B&W	
TV System	NTSC	
Picture Elements (pixels)	768 (H) × 494 (V)	
Min. Illumination	0.002 lux (0.1 lux DNR off)	
Signal to Noise Ratio	More than 50dB (AGC Off)	
Synchronizing System	Internal	
Video Output	1Vp-p 75ohm	
OSD Options	DNR Level BLC On/Off AGC On/Off White Balance Camera ID Mirror Day/Night Privacy Zone Gamma Contrast Sharpness Color Adjust	
Power Requirement	24VAC ±10%	
Operating Current	300mA max.	
Operating Condition	-20 ~ 122°F (-29°C ~ +50°C)	
Measurements	ø5.6 × 4.7 inches (ø143mm × 119mm)	
Weight (Camera Only)	2.4 lbs. (1.1kg)	

Specifications subject to change without notice

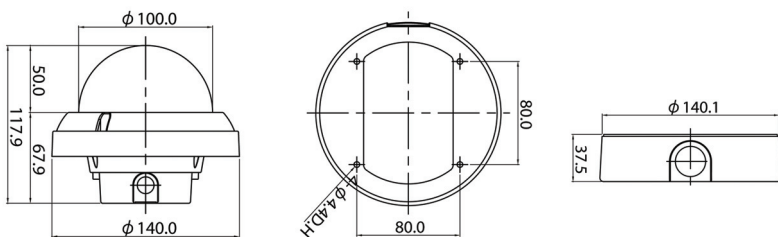

HDCWBR
Wall Mount Bracket



Can also be flush mounted