


H20X15MEA

15~300mm F3.6 – C-Mount

Compatible with 1/2" & 1/3" Cameras

Focal Length:	15~300mm	Input Impedance:	High Impedance
Max. Relative Aperture:	1:3.6	Sensitivity Adjustment:	Image Signal Level 0.5~1.0Vp-p
Iris:	F3.6~Approx. F360 With ND Spot Filter	Auto-Iris Accuracy:	With Input Video Signal 0.7Vp-p Within ±15% of Mean value
Zoom Ratio:	20X	Operation:	Zoom: Motorized (DC±4V~12V, Max 40mA) Speed Approx. 6 sec. (at 6.4V)
Angular Field of View:	1/2": 24.1° × 18.2° at 15mm 1.2° × 0.9° at 300mm 1/3": 18.2° × 13.7° at 15mm 0.9° × 0.7° at 300mm	Focus: Motorized (DC±4V~12V, Max 40mA) Speed Approx. 7 sec. (at 6.4V)	Iris: Auto (DC+8~16V: Fixed Voltage, Max. 40mA) Speed Within 3.5 sec.
Min. Object Distance (M.O.D.):	2.5m (From Front Vertex)	Operation Temperature:	-10 ~ +50°C (+14 ~ 122° F)
Optical Back Focal Distance:	11.40mm (In Air)	Filter Size:	62mm P0.75
Auto-Iris Input Signal:	Composite Video Signal or Video Signal	Mount:	C-mount (Adjustable Lens Position)
		Size, Approx. Weight:	75.5 × 66 × 154.5mm (w/h/d), 850g (Approx. 3.0 × 2.6 × 6.1in., 1.9lb.)

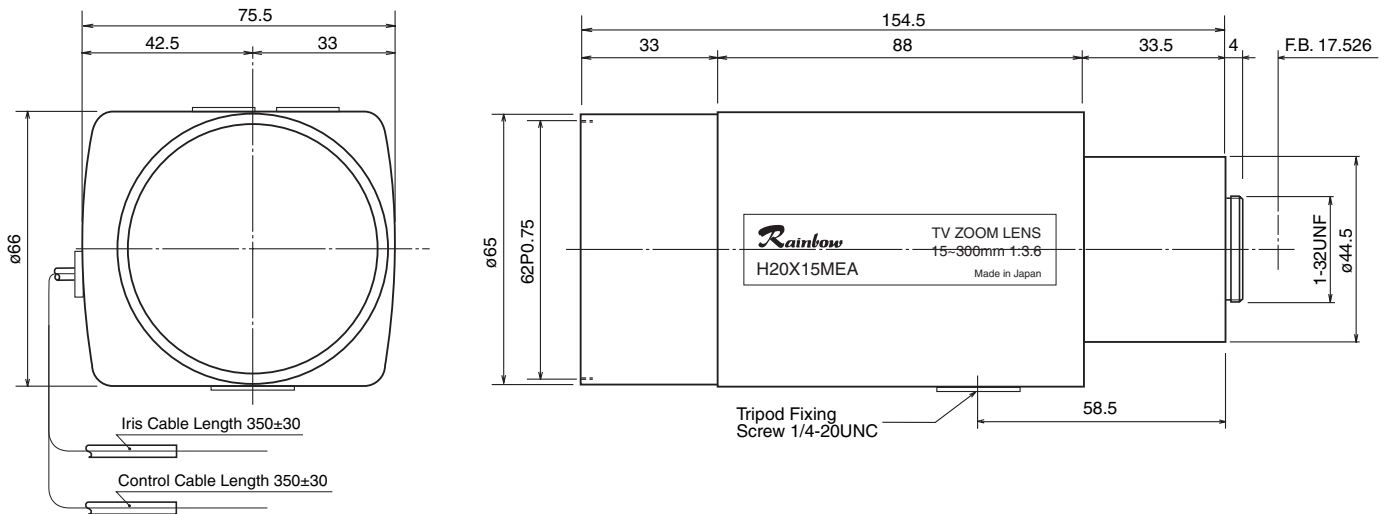

– Circuit Diagram –

