

## Features


- 1/3" Color Sony Super HAD CCD
- 550 lines, 0.002 lux
- Weatherproof aluminum housing with polycarbonate dome (IP66)
- 2.8~12mm lens
- DNR (Digital Noise Reduction) for outstanding performance in low light conditions without the need for added illumination
- 3-D camera bracket, Installer Video Out
- 12VDC/24VAC
- 3-year warranty



**DNR** DIGITAL NOISE REDUCTION

Model	MVCHF2R
Image Sensor	Color 1/3" Sony Super HAD CCD
Lens	2.8~12mm DC auto-iris
Horizontal Resolution	550 TV Lines Color / 590 TV Lines B/W
TV System	NTSC
Picture Elements (pixels)	768 (H) x 494 (V)
Min. Illumination	0.002 lux (0.1 lux DNR off)
Signal to Noise Ratio	More than 48dB
Synchronizing System	Internal
Video Output	1Vp-p 75ohm
Gamma Correction	r = 0.45
DIP Switches	AGC On/Off   BLC On/Off   Vertical Mirror   Horizontal Mirror   DNR On/Off
Power Requirement	12VDC/24VAC ±10%
Operating Current	500mA max. (use regulated power supply only for 12VDC)
Operating Condition	+14 ~ 122°F (-10°C ~ +50°C)
Measurements	ø4.1 x 3.2 inches (ø105mm x 80mm)
Weight	1.2 lbs. (550g)

Specifications subject to change without notice

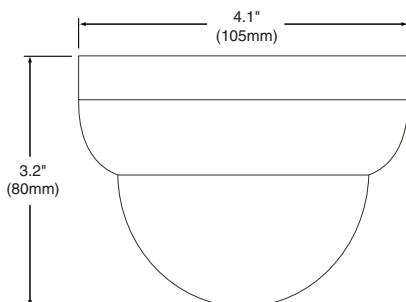

**MVCHWB**  
Wall Mount Bracket

**3-D CAMERA BRACKET**  
For maximum flexibility

