


H20X15M

15~300mm F3.6 – C-Mount

Compatible with 1/2" & 1/3" Cameras

Focal Length:	15~300mm	Operation:	Zoom:	Motorized (DC±4V~12V, Max 40mA) Speed Approx. 6 sec. (at 6.4V)
Max. Relative Aperture:	1:3.6		Focus:	Motorized (DC±4V~12V, Max 40mA) Speed Approx. 7 sec. (at 6.4V)
Iris:	F3.6~Close		Iris:	Motorized (DC±4V~12V, Max 40mA) Speed Approx. 2.5 sec. (at 6.4V)
Zoom Ratio:	20X	Operation Temperature:	-10 ~ +50°C (+14 ~ 122° F)	
Angular Field of View:	1/2": 24.1° × 18.2° at 15mm 1.2° × 0.9° at 300mm 1/3": 18.2° × 13.7° at 15mm 0.9° × 0.7° at 300mm	Filter Size:	62mm P0.75	
Min. Object Distance (M.O.D.):	2.5m (From Front Vertex)	Mount:	C-mount (Adjustable Lens Position)	
Optical Back Focal Distance:	11.40mm (In Air)	Size, Approx. Weight:	75.5 × 66 × 154.5mm (w/h/d), 850g (Approx. 3.0 × 2.6 × 6.1in., 1.9lb.)	

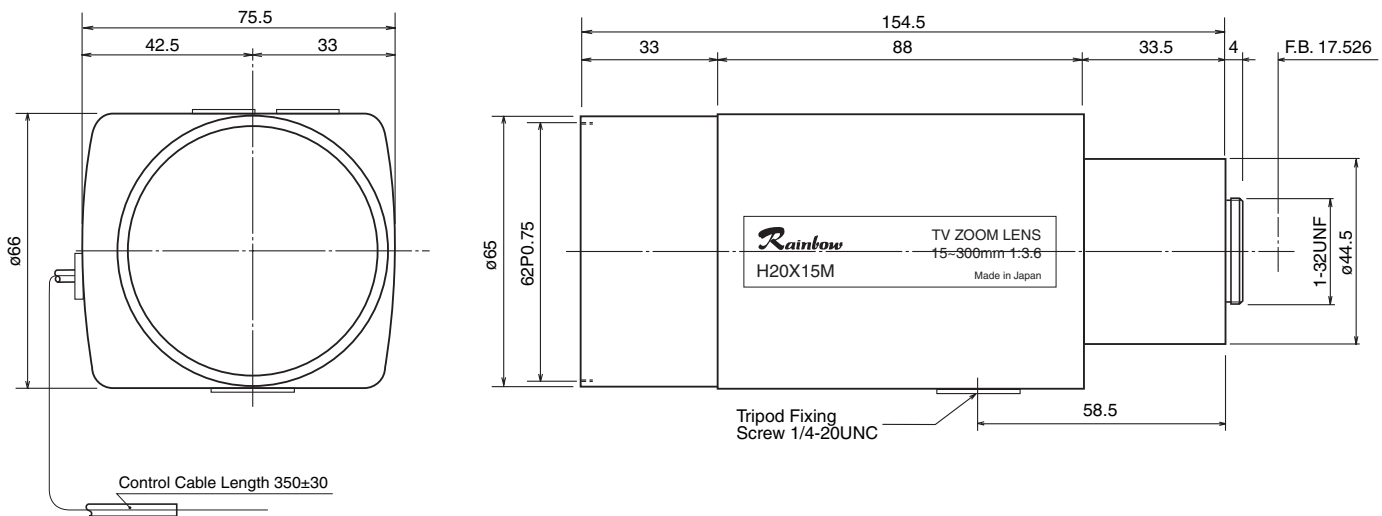

– Circuit Diagram –

